


DisRuptor

The individually adaptable DisRuptor for mechanical disintegration of solids

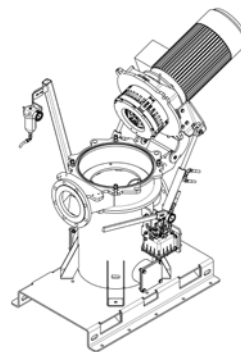

Type	Max. throughput*	Max. pressure	Installed drive power	Drive speed	Connections	Design available
	m ³ /h	bar	kW	min. ⁻¹	DIN	
DR7000	200	4	15 / 22	975	150/200	Inline/Compact XL

* Throughput depending on DS content